



Specializing in Cafeteria Serving Lines

G.A. SYSTEMS, Inc.

Speedline Freezer Cabinet



Model F3 shown.

Project: _____
 Item #: _____
 Model #: _____

Speedline Freezer Cabinets are designed to safely hold, display and serve prepackaged foods at required temperature. One stainless steel bi-fold removable lid is provided. Exterior options include high pressure laminate, stainless steel, powder coated, graphics and more.

SPECIFICATIONS

Top is 16 gauge 304 stainless steel #4 finish bound with (4) 10/32 stainless steel screws flush at each end. No exposed screws on the front or back of cabinet. Front and back edges turned down 102 degrees for sleek aesthetics. Corners at precisely 90 degrees for flush alignment to other cabinets. One 3/4" diameter pin is welded at each end of the top. Each pin has two 5/16" diameter holes. The lower hole is used to join adjacent G.A. Systems cabinets, the upper is used to secure the locking bar.

Body of cabinet is fabricated of 1" square 18 gauge stainless steel and cold rolled tubing to form top and bottom frames. Each is welded to 1-1/2" square 18 gauge stainless steel corner posts. Each corner post is filled with a urethane foam type insulation and capped to reduce condensation and to maintain high sanitary precautions. All joints are heli-arc welded with all exposed welds being ground and polished. 20 gauge galvanized body panels are welded to tubing super structure. An inner liner between outer walls and interior food well is constructed of 22 gauge stainless steel with 2B finish. Inner liner is surrounded with 1-1/4" #2000 urethane foam for optimum refrigeration retention and control.

Exterior front, back and ends trimmed with 22 gauge stainless steel #4 finish trim to accept interchangeable color panels.

Front removable access louver panel fabricated of 18 gauge 304 stainless steel finish #4 to provide easy access to mechanical compartment.

Freezer system has a cold wall type refrigeration system and is activated when unit is plugged into electrical source. Temperature is preset at the factory to hold prepackaged foods at a minimum of -10 degrees Fahrenheit.

Electrical requirements are 120Volt/60Hz/Single Phase 15 Amp circuit. 6' cord with a Nema 5-15P plug requiring a Nema 5-15R receptacle. 1/4HP compressor draws 4.0 amps.

Consider dimensions +2" on each side for door and pathway clearance.

ACCESSORIES

- Tray Slide (stainless steel or solid surface material)
- Cash Shelf (15", 20" or 24")
- Tray Shelf (12", 15" or 18")

STANDARD FEATURES

- Locking pins (2)
- Locking bar to secure lid
- Plate type 3" swivel non-marking casters with brakes
- 404A refrigerant
- Stainless steel lift off bi-fold lid



NEMA 5-15R


ETL CLASSIFIED



Intertek


NSF/ANSI St No.2

Rev 07/2018

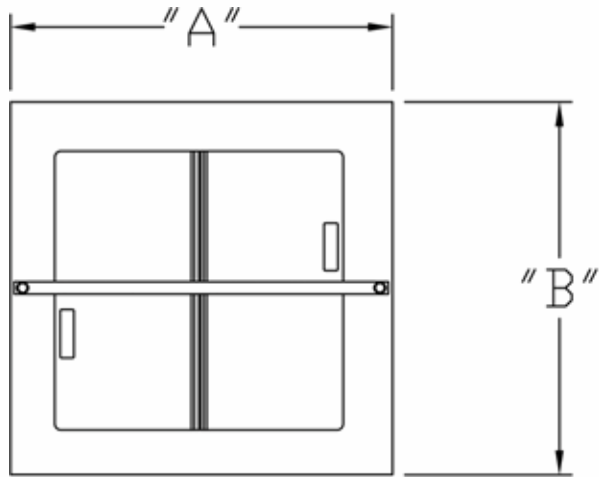


6' Cord NEMA 5-15P
Receptical Flush Mount


TOP VIEW

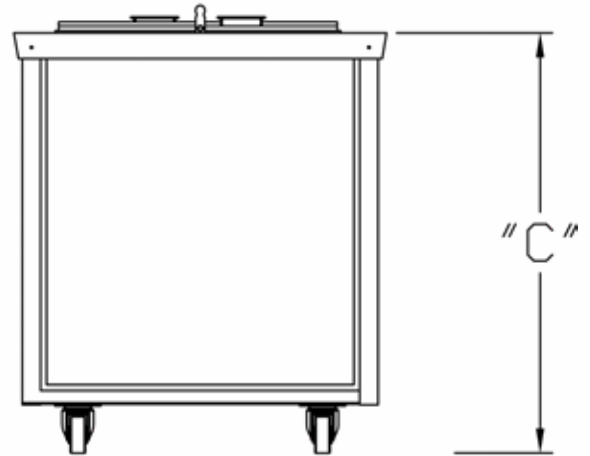

END VIEW

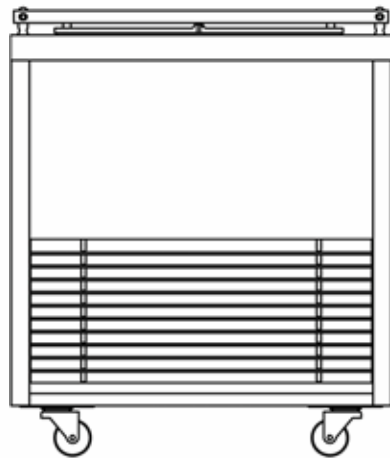

FRONT VIEW

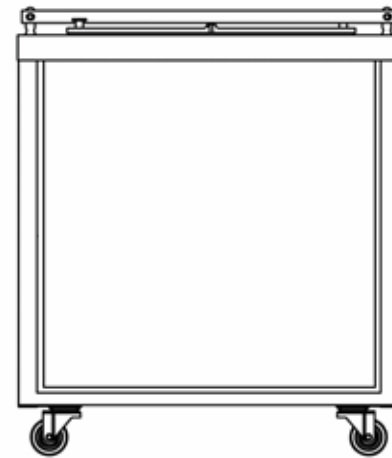

BACK VIEW

MODEL	A	B	C	Wt Lbs	Volt	Hz.	Requirement	Cord	Plug
F3	31-3/8"	30-3/8"	34"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15
F336	31-3/8"	36-3/8"	34"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15
EF3	31-3/8"	30-3/8"	31-1/2"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15
EF336	31-3/8"	36-3/8"	31-1/2"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15