



Specializing in Cafeteria Serving Lines

G.A. SYSTEMS, Inc.

# Speedline Cashier Stand Cabinet



Model D3130 shown.

## SPECIFICATIONS

Top is 16 gauge 304 stainless steel #4 finish bound with (4) 10/32 stainless steel screws flush at each end. No exposed screws on the front or back of cabinet. Front and back edges turned down 102 degrees for sleek aesthetics. Corners at precisely 90 degrees for flush alignment to other cabinets. One locking pin to adjoin other G.A. Systems units.

Under storage area can be used to store dry goods and also be used as a foot rest.

Body of cabinet is 20 gauge galvanized trimmed with 20 gauge stainless steel back and end panels. Tubular 1-1/2" square stainless steel tubing frames the cabinet's structure to join the front, back and end panels. Top frame is 1" square cold rolled tubing, bottom frame constructed from 1" square stainless steel tubing.

Front, back and ends trimmed with 22 gauge stainless steel #4 finish trim to accept interchangeable color panels. All NSF approved high pressure laminates are available as well as stainless steel or powder coated finish.

Bottom is fully enclosed. There is a 3.75" clearance from the bottom of the cabinet to the floor.

Plate type 3" swivel non-marking casters with brakes.

Consider dimensions +2" on each side for door and pathway clearance.

Project: \_\_\_\_\_  
Item #: \_\_\_\_\_  
Model #: \_\_\_\_\_

Speedline Cashier Stand Cabinets allow for ease of placement of cash registers. Exterior options include high pressure laminate, stainless steel, powder coated, graphics and more.

## ACCESSORIES

- Tray Slide  
(stainless steel or solid surface material)
- Condiment Inserts




## STANDARD FEATURES


- Cash drawer
- 1-3/4" grommet on top and bottom shelf
- Plate type 3" swivel non-marking casters with brakes
- Locking Pin (1)




NSF/ANSI St No.2  
Rev 07/2018

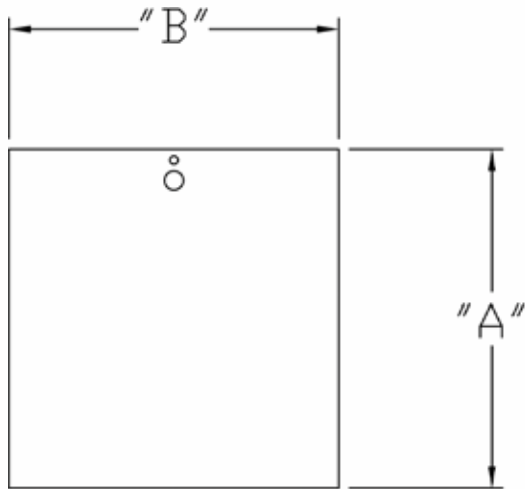


TOP VIEW

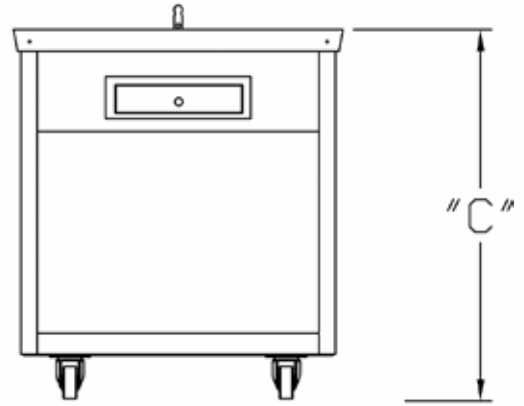

END VIEW

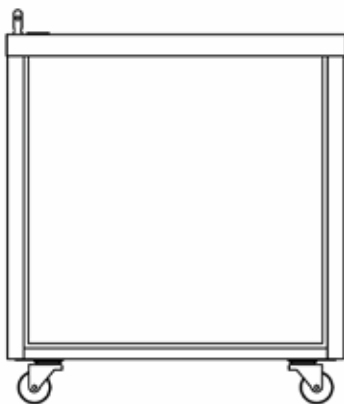

BACK VIEW

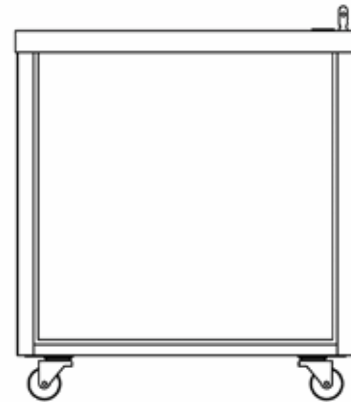

FRONT VIEW

MODEL	A	B	C
DLLWW	LL	WW	Height
D3130	31-1/8"	30-3/8"	34"
D3136	31-1/8"	36-3/8"	34"
D1930	19"	30-3/8"	34"
D1936	19"	36-3/8"	34"
EDLLWW	LL	WW	Height
ED3130	31-1/8"	30-3/8"	31-1/2"
ED3136	31-1/8"	36-3/8"	31-1/2"
ED1930	19"	30-3/8"	31-1/2"
ED1936	19"	36-3/8"	31-1/2"

Model:

LL = Length

WW = Width

E = Elementary

\*custom sizes available